


Фитинги Blue Ocean Fire Secure

Fire-S-B1 Тройник с переходными диаметрами /Класс В1

(Серийный код ВО-FS-0602010200)

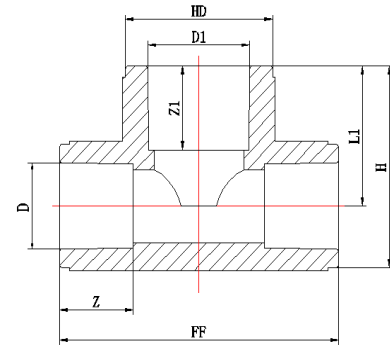

Маркировка фитинга	Диаметр, D, мм	Диаметр, D1, мм	Количество в упаковке, шт.	Вес кг	L1, мм	Z, мм	Z1, мм	H, мм	HD, мм	FF, мм
FS-PPRF/RT(R)-25x20x25/B1	25	20	150	0.030	29	16.5	15	46.5	28	56.5
FS-PPRF/RT(R)-32x20x32/B1	32	20	120	0.044	32.5	18.5	15	54.5	28	60.5
FS-PPRF/RT(R)-32x25x32/B1	32	25	120	0.050	34	18.5	16.5	56	35	65
FS-PPRF/RT(R)-40x20x40/B1	40	20	90	0.072	36.5	21	15	64.5	28	64.5
FS-PPRF/RT(R)-40x25x40/B1	40	25	90	0.077	38	21	16.5	66	35	69
FS-PPRF/RT(R)-40x32x40/B1	40	32	75	0.089	40	21	18.5	68	44	76
FS-PPRF/RT(R)-50x20x50/B1	50	20	60	0.117	41.5	24	15	76	28	71.5
FS-PPRF/RT(R)-50x25x50/B1	50	25	60	0.125	43	24	16.5	77.5	35	76
FS-PPRF/RT(R)-50x32x50/B1	50	32	45	0.141	45	24	18.5	79.5	44	83
FS-PPRF/RT(R)-50x40x50/B1	50	40	45	0.161	47.5	24	21	82	56	91
FS-PPRF/RT(R)-63x25x63/B1	63	25	24	0.206	49.5	28	16.5	92.5	35	84
FS-PPRF/RT(R)-63x32x63/B1	63	32	24	0.226	51.5	28	18.5	94.5	44	91
FS-PPRF/RT(R)-63x40x63/B1	63	40	24	0.252	54	28	21	97	56	108
FS-PPRF/RT(R)-63x50x63/B1	63	50	24	0.286	57	28	24	100	69	109
FS-PPRF/RT(R)-75x25x75/B1	75	25	24	0.309	55	32	16.5	105	35	93
FS-PPRF/RT(R)-75x32x75/B1	75	32	15	0.341	57	32	18.5	107	44	100
FS-PPRF/RT(R)-75x40x75/B1	75	40	15	0.373	59.5	32	21	110	56	108
FS-PPRF/RT(R)-75x50x75/B1	75	50	15	0.410	62.5	32	24	113	69	118
FS-PPRF/RT(R)-75x63x75/B1	75	63	12	0.475	66.5	32	28	117	86	131
FS-PPRF/RT(R)-90x32x90/B1	90	32	12	0.511	64.5	36	18.5	125	44	108
FS-PPRF/RT(R)-90x40x90/B1	90	40	10	0.558	67	36	21	127	56	116
FS-PPRF/RT(R)-90x50x90/B1	90	50	10	0.586	70	36	24	130	69	126
FS-PPRF/RT(R)-90x63x90/B1	90	63	6	0.667	74	36	28	134	86	139
FS-PPRF/RT(R)-90x75x90/B1	90	75	6	0.730	78	36	32	138	100	150
FS-PPRF/RT(R)-110x50x110/B1	110	50	4	0.979	80	42	24	154	69	138
FS-PPRF/RT(R)-110x63x110/B1	110	63	4	1.080	84	42	28	158	86	151

FS-PPRF/RT(R)-110x75x110/B1	110	75	4	1.165	88	42	32	162	100	162
FS-PPRF/RT(R)-110x90x110/B1	110	90	4	1.302	92	42	36	166	120	176
FS-PPRF/RT(R)-125x110x125/B1	125	110	2	1.913	107	45	42	191	148	205
FS-PPRF/RT(R)-140x110x140/B1	140	110	2	2.399	114	47	42	208	148	209
FS-PPRF/RT(R)-160x90x160/B1	160	90	2	2.795	121	49	36	230	120	191
FS-PPRF/RT(R)-160x110x160/B1	160	110	1	3.090	124	49	42	233	148	210
FS-PPRF/RT(R)-160x125x160/B1	160	125	1	3.371	127	49	45	236	168	230
FS-PPRF/RT(R)-160x140x160/B1	160	140	1	3.680	129	49	47	238	188	244



Продукция производится в соответствии с международным стандартом ISO: **EN ISO 15874:2013**
 Немецким стандартом: **DIN 8077:2008; DIN 8078;2008: DIN 16962**
 Американскими стандартами: **ASTM F 2389-2017a; NSF/ANSI 14-2016a; NSF/ANSI 61-2016**
 Российским стандартом: **ГОСТ 34415-2013**